


OS K53-65

TANTALUM SOLID-ELECTROLYTE CAPACITORS

elecond-market@elcudm.ru

+7 (34147) 2-99-89

AZHYAR.673546.014 TU



Moulded capacitors in plastic case have protected structure, low impedance and leakage current.

Capacitors are used in special-purpose and civilian equipment with demanding requirements to weight and dimensional characteristics.


Polar fixed capacitors are suitable for application in direct current, ripple current and pulse current circuits.

Capacitors are available in unified version suitable both for manual and automatic assembly.

MAIN PARAMETERS

Name	Value
Rated voltage, V	4...50
Rated capacitance, μF	0.1...470
Capacitance tolerance (20°C, 50 Hz), %	± 10 ; ± 20
Maximum operating temperature T_{env} , °C	+125
Minimal operating temperature T_{env} , °C	-60


CAPASITOR PHYSICAL CONFIGURATION

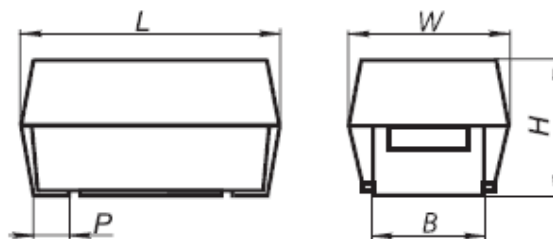


CAPACITORS OVERALL DIMENSIONS AND MASS

Case code	L, mm	W, mm	H, mm	P, mm	B, mm	Mass, g, max
A	3.2±0.2	1.6±0.2	1.6±0.2	0.8±0.3	1.2±0.1	0.05
B	3.5±0.2	2.8±0.2	1.9±0.2	0.8±0.3	2.2±0.1	0.06
C	6.0±0.3	3.2±0.3	2.5±0.3	1.3±0.3	2.2±0.1	0.3
D	7.3±0.3	4.3±0.3	2.9±0.3	1.3±0.3	2.4±0.1	0.5
E	7.3±0.3	4.3±0.3	4.1±0.3	1.3±0.3	2.4±0.1	0.6


Example for "C","D","E" case sizes marking



Example for "B" case size marking



Example for "A" case size marking



- 1 – Positive terminal (color stripe)
- 2 – Rated capacitance, pF
- 3 – Capacitance multiplier code
- 4 – Product code (only "65" is marked, stripe unavailability is acceptable)
- 5 – Rated voltage, V
- 6 – Production date code
- 7 – Trade mark
- 8 – Quality category "SM" (specialized military series), in the shape of a circle
- 9 – Stripe unavailability is acceptable

MARKING CODES DESIGNATION

Code	Year
I	2017
K	2018
L	2019
M	2020
N	2021
P	2022
R	2023
S	2024
T	2025
U	2026
V	2027
W	2028
X	2029

Code	Month	Code	Month
1	January	7	July
2	February	8	August
3	March	9	September
4	April	O	October
5	May	N	November
6	June	D	December

Capacitance multiplier code	Capacitance multiplier
4	10^4
5	10^5
6	10^6
7	10^7
8	10^8

CAPACITORS CASE CODE

C, μ F	U, V								
	4	6.3	10	16	20	25	32	40	50
0.1									A
0.15									A
0.22								A	B
0.33							A	B	B
0.47						A	B	B	C
0.68					A	A	B	B	C
1				A	A	B	B	C	C
1.5			A	A	A	B	C	C	D
2.2		A	A	A	A,B	C	C	C	D
3.3	A	A	A,B	A,B	B	C	C	D	D
4.7	A	B	B	B	B	C	D	E	E
6.8	A,B	B	B	C	C	D	D	E	E
10	B	C	C	C	C	D	D		
15	B	C	C	C	D	D	E		
22	B,C	C	C	D	D	E			
33	C	C	D	D	D				
47	C	D	D	D	E				
68	C	D	D	E	E				
100	C	D	D,E	E					
150	D	E	E						
220	D,E	E							
330	D,E	E							
470	E	E							

CAPACITORS RELIABILITY

Reliability Operation modes	Minimal nonfailure operating time, t_{λ} , hours	Capacitor failure rate, λ , 1/hour, max
Maximum-permissible mode and operational environment (U_R , $T_{env}=85^{\circ}\text{C}$)	30 000	5×10^{-7}
Light mode and operational environment ($0.2-0.6U_R$, $T_{env}=55^{\circ}\text{C}$)	200 000	5×10^{-8}
Storageability Gamma-rated time of capacitor storageability T_{cy} at $\gamma=97\%$, years, min	25	

CAPACITOR ELECTRIC PARAMETERS VALUE WHEN DELIVERED

U_R , V	C_R , μF	$\text{tg } \delta$, %, 20°C , 100 Hz, max	I_{LEAK} , μA , 20°C , after 60 sec., max	ESR, Ohm, 20°C , 100kHz, max	Z, Ohm, 20°C , 100kHz, max
4	3.3	8	0.5	•	•
4	4.7	8	0.5	•	•
4	6.8	8	0.5	•	•
4	6.8	8	0.5	•	•
4	10	8	0.5	3.9	4
4	15	8	0.6	3.43	3.5
4	22	8	0.9	2.9	3
4	22	8	0.9	2.45	2.5
4	33	8	1.3	2.15	2.2
4	47	8	1.9	1.96	2
4	68	10	2.7	1.56	1.6
4	100	10	4	1.27	1.3
4	150	10	6	0.88	0.9
4	220	10	8.8	0.88	0.9
4	220	10	8.8	0.88	0.9
4	330	12	13.2	0.88	0.9
4	330	12	13.2	0.88	0.9
4	470	12	18.8	0.88	0.9
6.3	2.2	8	0.5	•	•
6.3	3.3	8	0.5	•	•
6.3	4.7	8	0.5	•	5.5

U_R, V	$C_R, \mu F$	$tg \delta, \%, 20^\circ C, 100 Hz, max$	$I_{LEAK}, \mu A, 20^\circ C, after 60 sec., max$	$ESR, Ohm, 20^\circ C, 100kHz, max$	$Z, Ohm, 20^\circ C, 100kHz, max$
6.3	6.8	8	0.5	4.4	4.5
6.3	10	8	0.6	2.94	3
6.3	15	8	0.9	2.94	3
6.3	22	8	1.4	2.15	2.2
6.3	33	8	2	1.76	1.8
6.3	47	10	2.9	1.07	1.1
6.3	68	10	4.1	0.88	0.9
6.3	100	10	6	0.88	0.9
6.3	150	10	9	0.88	0.9
6.3	150	10	9	0.88	0.9
6.3	220	12	13.2	0.88	0.9
6.3	330	12	19.8	0.88	0.9
6.3	470	12	28.2	0.78	0.9
10	1.5	8	0.5	•	•
10	2.2	8	0.5	•	•
10	3.3	8	0.5	5.4	5.5
10	3.3	8	0.5	5.4	5.5
10	4.7	8	0.5	4.4	4.5
10	6.8	8	0.7	3.43	3.5
10	10	8	1	2.45	2.5
10	10	8	1	2.45	2.5
10	15	8	1.5	2.45	2.5
10	22	8	2.2	0.98	1
10	33	10	3.3	1.56	1.6
10	33	10	3.3	1.07	1.1
10	47	10	4.7	0.88	0.9
10	68	10	6.8	0.88	0.9
10	100	10	10	0.88	0.9
10	100	10	10	0.88	0.9
10	150	12	15	0.88	0.9
10	150	12	15	0.88	0.9
10	220	12	22	0.88	0.9
16	1	8	0.5	•	•
16	1.5	8	0.5	•	•
16	2.2	8	0.5	5.4	5.5

U_R, V	$C_R, \mu F$	$tg \delta, \%, 20^\circ C, 100 Hz, max$	$I_{LEAK}, \mu A, 20^\circ C, after 60 sec., max$	$ESR, Ohm, 20^\circ C, 100kHz, max$	$Z, Ohm, 20^\circ C, 100kHz, max$
16	3.3	8	0.5	4.9	5
16	3.3	8	0.5	4.9	5
16	4.7	8	0.8	3.92	4
16	6.8	8	1.1	2.45	2.5
16	6.8	8	1.1	2.45	2.5
16	10	8	1.6	2.45	2.5
16	15	8	2.4	1.76	1.8
16	22	10	3.6	1.07	1.1
16	33	10	5.3	0.88	0.9
16	47	10	7.5	0.88	0.9
16	68	10	10.9	0.88	0.9
16	100	12	16	0.88	0.9
16	150	12	24	0.88	0.9
20	0.68	8	0.5	•	•
20	1	8	0.5	•	•
20	1.5	8	0.5	•	•
20	2.2	8	0.5	6.4	6.5
20	2.2	8	0.5	4.9	5
20	3.3	8	0.7	3.92	4
20	4.7	8	1	2.94	3
20	6.8	8	1.4	2.35	2.4
20	10	8	2	1.86	1.9
20	15	10	3	1.66	1.7
20	15	10	3	1.07	1.1
20	22	10	4.4	1.57	1.6
20	33	10	6.6	0.88	0.9
20	47	10	9.4	0.88	0.9
20	68	12	13.6	0.88	0.9
20	100	12	20	0.88	0.9
25	0.47	8	0.5	•	•
25	0.68	8	0.5	•	•
25	1	8	0.5	•	•
25	1.5	8	0.5	6.37	6.5
25	2.2	8	0.6	3.43	3.5
25	3.3	8	0.9	3.43	3.5

U_R, V	$C_R, \mu F$	$tg \delta, \%, 20^\circ C, 100 Hz, max$	$I_{LEAK}, \mu A, 20^\circ C, after 60 sec., max$	$ESR, Ohm, 20^\circ C, 100kHz, max$	$Z, Ohm, 20^\circ C, 100kHz, max$
25	4.7	8	1.2	2.45	2.5
25	6.8	8	1.7	1.96	2
25	6.8	8	1.7	1.37	1.4
25	10	10	2.5	1.17	1.2
25	15	10	3.8	0.98	1
25	22	12	5.5	0.88	0.9
25	33	12	8.3	0.88	0.9
32	0.33	8	0.5	•	•
32	0.47	8	0.5	•	•
32	0.68	8	0.5	•	•
32	1	8	0.5	6.37	6.5
32	1.5	8	0.5	4.4	4.5
32	2.2	8	0.8	3.43	3.5
32	3.3	8	1.2	2.45	2.5
32	4.7	8	1.7	1.47	1.5
32	6.8	10	2.4	1.27	1.3
32	10	10	3.5	0.98	1
32	15	12	5.3	0.88	0.9
32	22	12	7.7	0.88	0.9
40	0.22	8	0.5	•	•
40	0.33	8	0.5	•	•
40	0.47	8	0.5	•	•
40	0.68	8	0.5	•	•
40	1	8	0.5	6.17	6.3
40	1.5	8	0.5	4.21	4.3
40	2.2	8	0.8	3.43	3.5
40	3.3	8	1.5	2.25	2.3
40	4.7	12	2	1.17	1.2
40	6.8	12	3	0.88	0.9
50	0.1	8	0.5	•	•
50	0.15	8	0.5	•	•
50	0.22	8	0.5	•	•
50	0.33	8	0.5	•	•
50	0.47	8	0.5	7.8	8
50	0.68	8	0.5	6.86	7

U_R, V	$C_R, \mu F$	$tg \delta, \%, 20^\circ C, 100 Hz, max$	$I_{LEAK}, \mu A, 20^\circ C, after 60 sec., max$	$ESR, Ohm, 20^\circ C, 100kHz, max$	$Z, Ohm, 20^\circ C, 100kHz, max$
50	1	8	0.5	5.9	6
50	1.5	10	0.8	3.9	4
50	2.2	10	1.1	2.45	2.5
50	3.3	10	1.7	1.96	2
50	4.7	12	2.4	1.47	1.5
50	6.8	12	3.5	0.88	0.9

- – Value is not normalized

EXAMPLE OF REFERENCE DESIGNATION FOR ORDERING

CAPACITOR OS K53-65 "C" – 16V – 15 μ F \pm 10% AZHYAR.673546.014 TU

If the capacitors for automatic assembly are required it is to be stated in the delivery contract.